


Radio-Remote Control

Features of the DECT radio-remote control

The radio-remote control enables the user to control all motorized functions within the studio. Furthermore, it also displays the status messages, coming from the single control boxes (i.e. single suspension devices):

- Emergency switch upper maximum range
- Emergency switch lower maximum range
- Overload
- Cable break
- Slack cable
- No communication with monopole

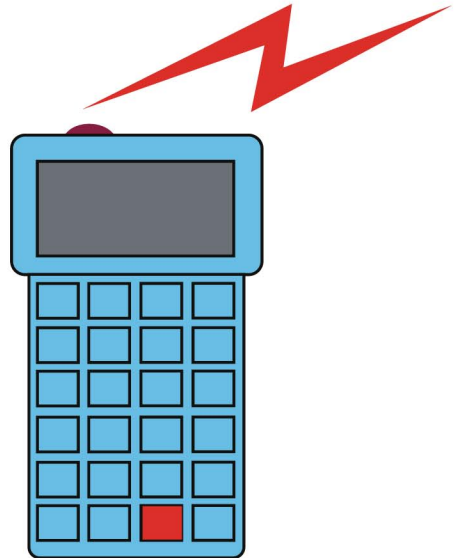


DECT features:

- Bi-directional data rate of up to 115.2 kbps
- Range of up to 300 m (free field) and up to 50 m inside buildings
- 400 transmission channels
- Automatic channel selection; several transmitters may be used independently within the same studio simultaneously

Features of the transmitter:

- Continuous operation for up to 10 hours
- All status information on LC display

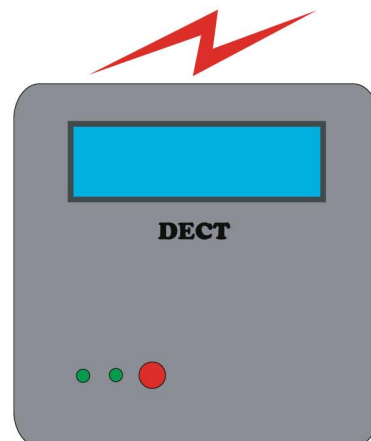

Subject to change without prior notice